## Page 1 of 3 Specifications / Installation Instructions Freestanding models: Genesis, Aquos, Phoenix, Galaxy Effective 1st December 2020

# W O O D F I R E S

## IMPORTANT

It is the responsibility of the installer to ensure that the installation of this appliance complies with AS/NZS 2918



| Supplied:   | Ethos 1   | freestanding fire   |  |  |
|---|---|---|--|--|
|   | Flue ki   | t: 3 x 1200 130mm SS flue   | Ethos fires have been tested to and  |  |
|   |   | 1 x 600 130mm SS flue   | complied with AS/NZS2918:2001  |  |
|   |   | 2 x 200 x 1200 liners (black)   |  |  |
|   |   | 1 x 200 x 1200 liner (galv)   | Test report #<br>Genesis: ARS 02/673<br>Phoenix: ARS 03/924<br>Galaxy: ARS 18/2949<br>Aquos: ARS 08/1841 |  |
|   |   | 1 x Revolving cowl & cone   |  |  |
|   |   | 1 x Ceiling plate(black)  |  |  |
| Not included in kit:  |   | Flashing  | Aquus. Ans 00/1041   |  |
|   |   | Hearth / Floor protector  |  |  |
|   |   | Screws / Rivets   |  |  |
|   |   | Dynabolts   |  |  |
|   |   | Fire cement   |  |  |
|   |   | Mounting rails  |  |  |
| Flue kit:   |   | Ethos wood fires must be fitted with the Ethos factory flue kit as this has been specifically designed to achieve optimum performance of the unit. It must be a minimum of 4.2 mtrs.<br>note: It is essential that the 130mm stainless steel flue is well sealed & riveted it must also be securely |  |  |
|   | fitted & sealed into the exhaust spigot of the fire using stainless steel rivets or screws. |   |  |  |
| Shielding:  |   |   |  |  |
|   |   | ( ref: AS/NZS 2918)   |  |  |
| Seismic restraint:  |   | Use 2 x 6mm dynabolts or similar, two holes are provided in the rear of the firebox pedestal or feet  |  |  |
|   |   | for this purpose.   |  |  |
| Floor protector: The floor protector must be an approved heat resistant material. |   | rial.   |  |  |
|   |   |   |  |  |

WARNING: THE APPLIANCE AND FLUE SYSTEM SHALL BE INSTALLED IN ACCORDANCE WITH AS/NZS 2918 AND THE APPROPRIATE REQUIREMENTS OF THE RELEVANT BUILDING CODE OR CODES.

WARNING: APPLIANCES INSTALLED IN ACCORDANCE WITH THIS STANDARD SHALL COMPLY WITH THE REQUIREMENTS OF AS/NZS 4013 WHERE REQUIRED BY THE REGULATORY AUTHORITY, I.E. THE APPLIANCE SHALL BE IDENTIFIABLE BY A COMPLIANCE PLATE WITH THE MARKING "TESTED TO AS/NZS 4013"

ANY MODIFICATION OF THE APPLIANCE THAT HAS NOT BEEN APPROVED IN WRITING FROM THE TESTING AUTHORITY IS CONSIDERED TO BE IN BREACH OF THE APPROVAL GRANTED FOR COMPLIANCE WITH AS/NZS 4013.

**CAUTION:** MIXING OF APPLIANCE OR FLUE SYSTEM COMPONENTS FROM DIFFERENT SOURCES OR MODIFYING THE DIMENTIONAL SPECIFICATION OF COMPONENTS MAY RESULT IN HAZARDOUS CONDITIONS. WHERE SUCH ACTION IS CONSIDERED, THE MANUFACTURER SHOULD BE CONSULTED IN THE FIRST INSTANCE.

CAUTION: CRACKED AND BROKEN COMPONENTS, e.g. GLASS PANELS OR FIREBRICKS, MAY RENDER THE INSTALLATION UNSAFE.








# Page 2 of 3 Specifications / Installation Instructions Freestanding models: Genesis, Aquos, Phoenix, Galaxy




This Flue Kit must be installed by a suitably qualified tradesperson or a solid fuel heater installer.

\* This kit may require additional components to complete installation.

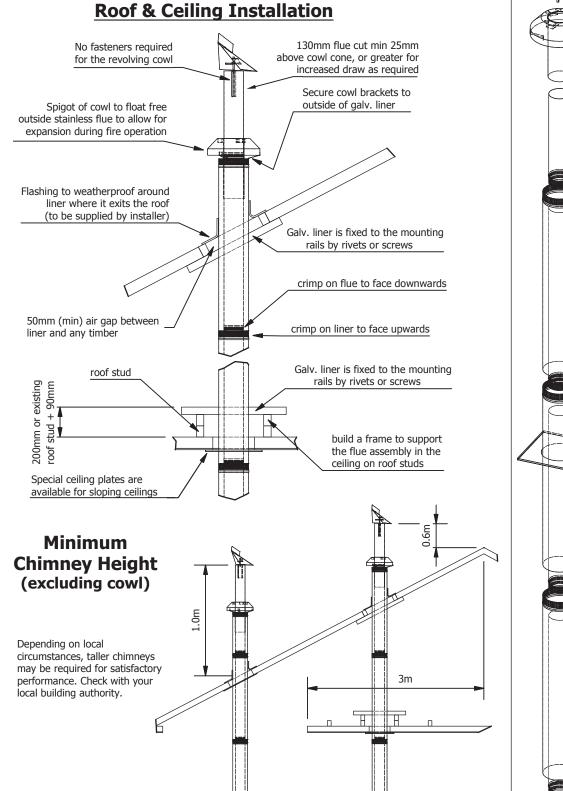



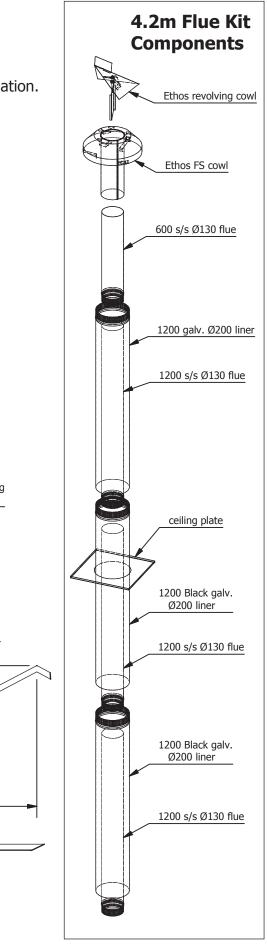

IM th Th


IMPORTANT: It is the responsibility of the installer to ensure that the installation of this appliance complies with AS/NZS 2918. The above installation diagrams are provided as a guide only.


# Page 3 of 3 Specifications / Installation Instructions Freestanding models: Genesis, Aquos, Phoenix, Galaxy




**Spigot Diameters** 

← R →

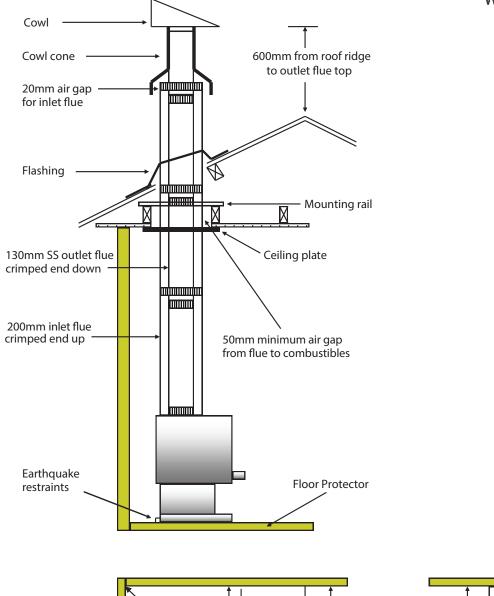






310

85





IMPORTANT: It is the responsibility of the installer to ensure that the installation of this appliance complies with AS/NZS 2918. The above installation diagrams are provided as a guide only.

D Ε G Н L J Κ Ν 0 300 955 300 800 580 38 1000 300 655 455 215 870 800 580 19 1000 300 430 300 655 all dims mm Ρ R S Т U V W Genesis / Galaxy 200 740 540 130 130 485 740 670 Aquos 200 130 540 130 485 Phoenix 670 485 200 130 540 130

Australia

Capisco Aust Pty Ltd 2/281 Pacific Highway North Sydney, NSW 2060 Phone (02) 8310 7304 www.capisco.com.au

### New Zealand

With flue shield

Capisco Ltd PO Box 938, Whangaparaoa Auckland 0930 Phone (09) 947 5166 www.capisco.co.nz

#### ethosfires.com.au ethosfires.co.nz

Notes/Installer/Dealer Details

All information in this instruction document is accurate at the time of printing manufacturer reserves the right to change or amend specifications or designs without notice